


Designation: Toggle Anchor

Designed to be installed on a horizontal steel surface very quickly thanks to a pressure button that selects the function "open" or "lock". A hole of diam. 21 mm to 30 mm is needed for the installation.

Minimum breaking strength: 23 kN.

Length: 20 cm.

Compliance: EN795:2012 Type B.

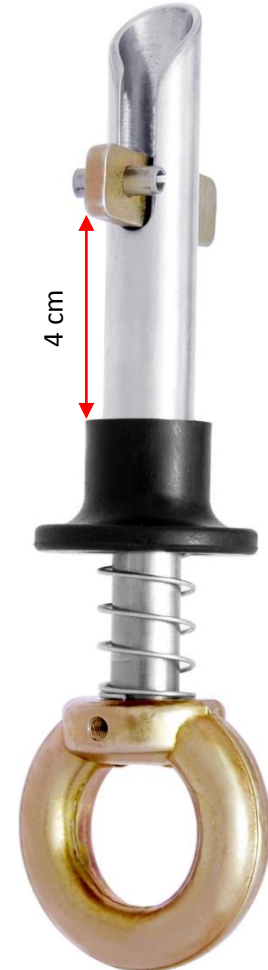

Material:

Steel and Stainless Steel

HS code

83081010

Carton Size / Pieces

24x45x15 / 20

Unit Weight

0.55 Kg

AET : N° 6235 Issue 1 Extension 1

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



MAJ : 01/15

ZI les portes du Dauphiné

4 rue de l'Aigue

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

