




TECHNICAL SHEET FA 60 029 05

ADJUSTABLE ANCHORAGE LANYARD, 5 MTRS MAX.

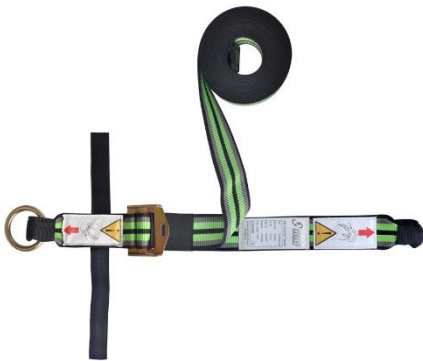

Adjustable anchorage lanyard

- **Length:** adjustable from 0 to 5 mtrs max., **width:** 45 mm.
- Ideal for installation and use on large-sized structures (skydomes, trees, etc...), beam anchors, posts, ...
- Can be used with a horizontal temporary lifeline.
- Two elastic loops for holding the free end during the use.
- Has a small Velcro strap to keep the lanyard rolled up when not in use.
- **Breaking strength** > 24 kN.

Compliance: EN 795:2012 Type B.

Static strength > 18 kN.

Material of components:

Webbing: Polyester

O-ring and adjusting buckle: Steel

Length:	CE	Weight:
Maxi 5 mtrs		0.55 kg

KRATOS SAFETY

ZI les Portes du Dauphiné
4, rue de l'Aigue
69780 Saint Pierre de Chandieu – FRANCE

Tel. : +33 (0)4 72 48 78 27

Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

6307 90 98

CARTON SIZE / PIECES

40 x 40 x 24 cm / 10

AET N° I E

Satra Technology Centre, N°0321

Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120

Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom